



Garage Doors Catalogue



OZ GD Standard



Ideal for Security/Insulation

OZ garage doors are ideal for the closing of any building, due to their resistance and easy handling. They also save energy in the installations which require thermal insulation and protect your asset safely.

STANDARD DESIGN

Sahara Grey(RAL 7016)



Smooth White(RAL 9016)




Classic White (RAL 9016)



Golden Oak



Windows option

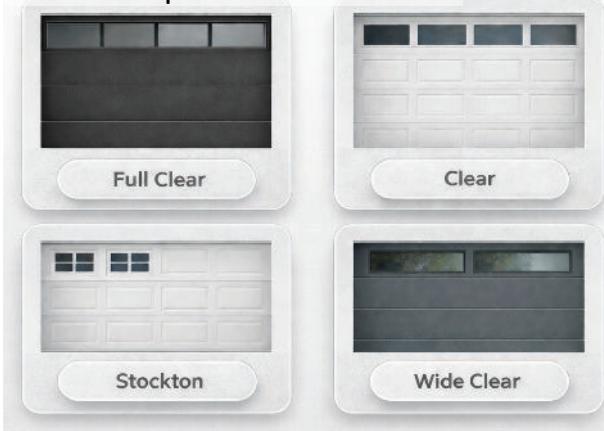

Special colors

Available in Special Colors



OZ GD Full-View




Ideal for Beautiful appearance

Thanks to their transparency, resistance and aesthetics, the OZ FV garage doors are the best option to benefit from natural light, to show the inside to the outside and to give a modern image.

FULL-VIEW DESIGN


Black and Clear

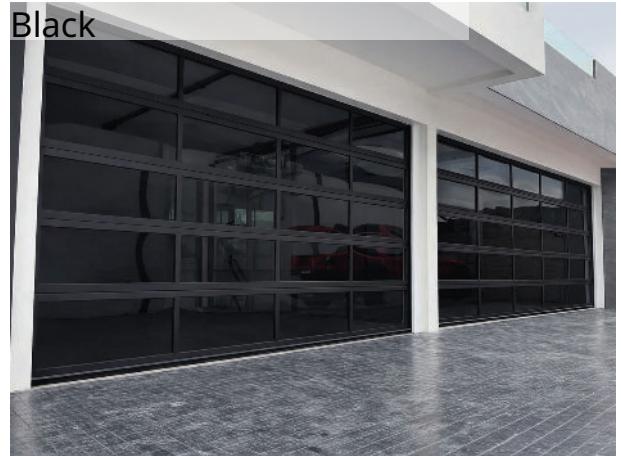


White



Custom

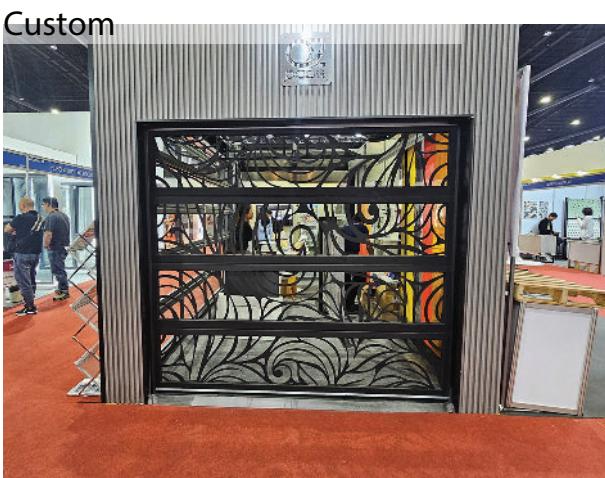

Special colors

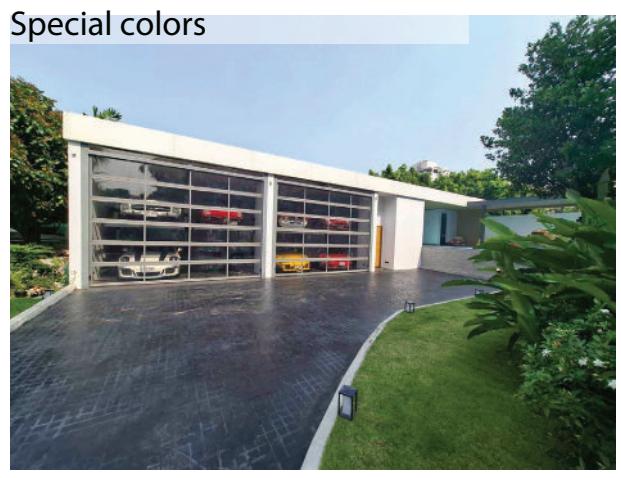

OZ GD Flush Mount



Ideal for Beautiful appearance

The OZ Door Flush Mount Garage Door integrates seamlessly with your home's exterior wall. The door panels are clad with the same material as your façade — when closed, the door is virtually invisible.

Wood Slat – Horizontal




AL Composite – Modern




Horizontal Wood – Classic



AL Composite – Bronze

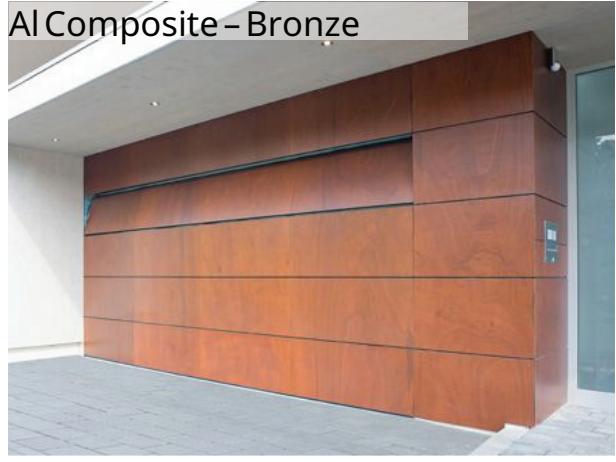

Close up

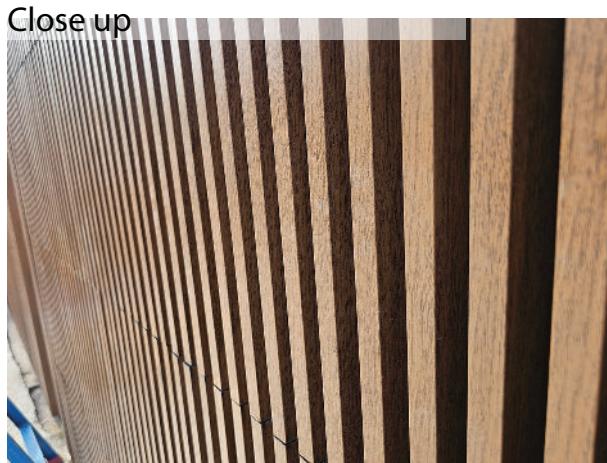

Process

This flush mount door can be finished using materials supplied by the customer, or with a wide range of finishing materials provided by OZ Door for the Thailand market.

Pricing varies depending on the selected finishing material, specifications, and installation requirements. Please contact us for detailed consultation and pricing.

PEDESTRIAN DOOR(Optional)

Matching Personnel Door




A separate pedestrian access door installed next to the garage door, manufactured with the same panel design

Door-in-Door



Pedestrian door inside the garage door for quick access without full opening.
*for Small door only

LIFT TYPE & REQUIREMENT

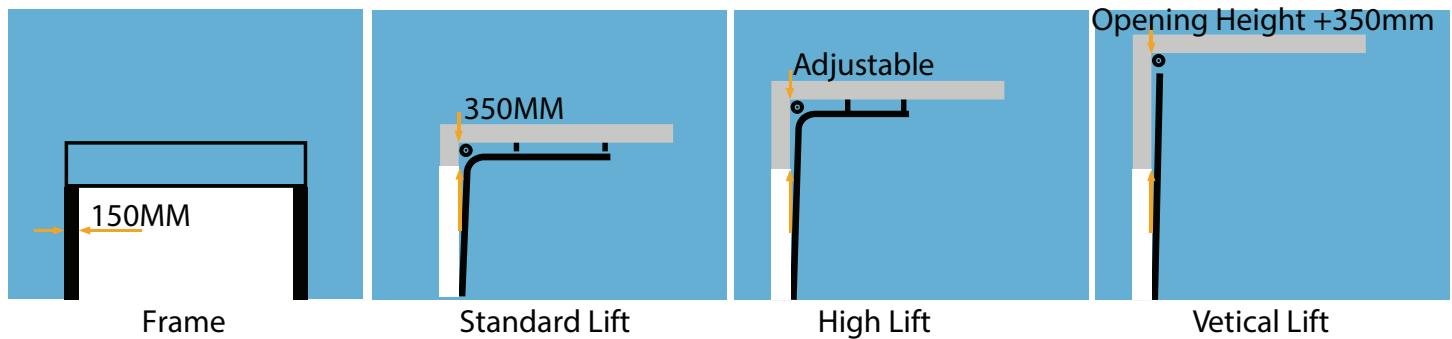

SCAN ME

Check the video with the QR code

Garage doors are railed differently to suit the customer's site. OZ door master will directly check the site and provide the right solution.

Data sheet

Operator
Opening and closing speed 0.2~0.4m/s
Power Output 1100W
Power Supply 220V±10%/50hz/1 phase
Protection Rating (Motor) IP55
Manual Release Handle
Environmental Conitions -35°C- 60°C
Limit Switch Absolute Encoder
Self Lock Integrated Mechanical Brake
Noise ≤60db

Hardware
Rail strengthen plate 2.0mm galvanized steel plate
Hinge 2.5mm galvanized steel plate
Spring axis 25.4mm galvanized steel bar
Spring brace 4.0mm galvanized steel plate
Spring Chosen according to door size, weight and lifting pattern with Spring brake device

Panel
Max size W11000mm,H3000mm
Plate Two layer 0.5mm pre coated steel
Filling Environment friendly polyurethane complying with international environment protection treaty 141B
Total thickness 40mm(standard)
Thermal insulation≤0 .033W/m2 ·K
Sound insulation 24dB
PU density 48 kg /m3
Fire retardation Class A
Surface printing layer 30um
Wind resistance 30m/s

Warranty
Hardware 3 Years
Panel 3 Years
Spring 3 Years
Operator 2 Year

OPERATOR

SOMMER



Our garage door operators are tested and certified according to the strictest guidelines. Experience over more than 40 years ensures that our products are of the highest quality and naturally Made in Germany.

Pearl Vibe



- Option of querying door positions/reception status
- Noticeable feedback of radio commands with vibration
- Battery-operated

SOMtouch



- Bidirectional SOMloq2 radio control system
- Feedback of radio commands with LED
- Battery-operated

SAFETY DEVICE




Safetybeam detects objects during closing, , door stops working immediately(Standard)



Safetyedge contact obstacles during closing, door stops working immediately(Optional)

Accessories

For all Garage doors

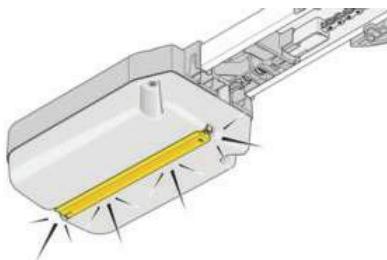

Lumi+

Additional LED lighting for the roof control. It is switched in parallel with the lighting in the carriage and can be easily switched on and off using the light function by means of a transmitter.




Buzzer

Two functions in one product: The alarm buzzer recognises a break-in attempt and outputs a loud signal tone. The warning buzzer, on the other hand, outputs an acoustic signal during the closing process or when the slip door is open.



Accu

Supplies energy to the operator for maximum 5 door cycles > in the event of a power failure.

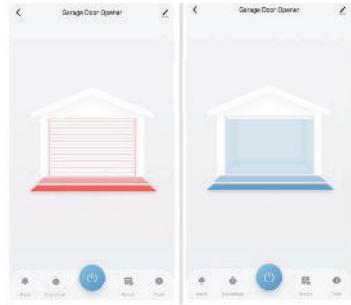

App control

allows you to control garage doors via voice control
Check the status of the current door (open, closed)
Manage anywhere in the world over the Internet
Check the open and closed history

Pearl Vibe

Range: approx. 60–150 m (depending on the surroundings)
•Battery: 3 V, Type CR2032
•Dimensions: 79x26x13 mm




Pearl holder&Visor Clip

For mounting in the car or on the wall



ENTRApin+

ENTRApin+ works with a numeric code of at least 4 and no more than 8 digits.
Bidirectional SOMloc2 radio control system
Feedback of radio commands with LED
Battery-operated

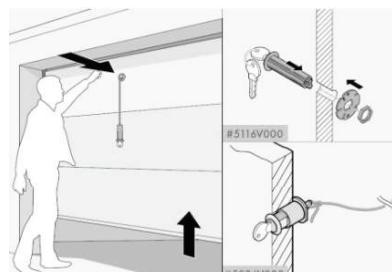

Emergency Release Lock

Manually release your garage door opener with a key in the case of power outage or operator failure
A must for garages without an access door



ENTRAsys+ finger scanner

Memory locations: 50–80 fingerprints
•Administrators: 9 fingerprints
•Radio commands: 4
•Range: approx. 25 m (depending on the surroundings)
•Dimensions: 64.5 x 130 x 37 mm
•Battery: 4x Mignon (AA), 1.5 V
•Temperature range: -20 °C to +55 °C

OZ Doors Range

A Wide Range to Satisfy All Needs.

OZ door is not just a specialist in industrial and Garage doors. More than 10years of experience in its sector have led OZ to extend its product range, to fully satisfy all the needs of its customers.

Oz door range of products brings together variety, innovation, functionality, quality, price and service. this is the result of the constant work of its different departments.

Just contact the OZ specialists and they will deal with meeting all of your needs

2 Year Perfect Warranty

With confidence and technology in our products, we offer a full two-year warranty on all industrial automatic doors. Unlike other companies that import and install doors, Oz is possible because it directly manufactures and installs/services in Thailand. You can use it after installation without any worries.



High-speed door



Sectional door



Garage doors




Auto doors



Dock shelter/leveler



Mega door

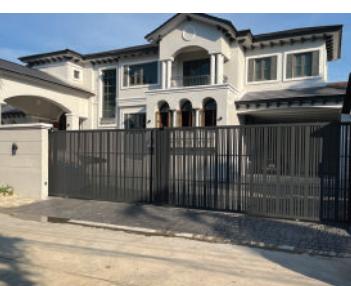

Auto gate



Customized door

Regulative:

All Doors of OZ designed in compliance with norm UNE -EN 13241.

In addition to the following parameters :

EN 12604 : 2000 Mechanical aspects of the doors (requirements)

EN 12605 : 2000 Mechanical aspects of the doors (tests)

EN 12453 : 2000 Security in the use of motorized doors (requirements)

EN 12445 : 2000 Security in the use of motorized doors (tests)



<https://ozdoor.co.th>
Email: Info@ozdoor.co.th
Line: [@ozdoor](https://line.me/R/ti/p/@ozdoor)
Tel: 061 393 1020(K. KOB)
091-756-3717(K. NUT)
038 197 101

