OZ DOOR

Modern · Secure · Durable

CATALOGUE

PREMIUM GARAGE DOORS

Designed for Modern Living

2026 Product Catalogue

Timeless Elegance for a Perfect Home

Scan to Visit

OZ STANDARD DESIGN

GD Classic (RAL 9016)

GD Smooth Grey (RAL 7016)

GD Golden Oak

GD Smooth White (RAL 9016)

OZ FULL-VIEW DESIGN

GD Clear Polycarbonate

GD Black Polycarbonate)

GD White Polycarbonate

*Prices may vary depending on each model

PERFORMANCE & DESIGN

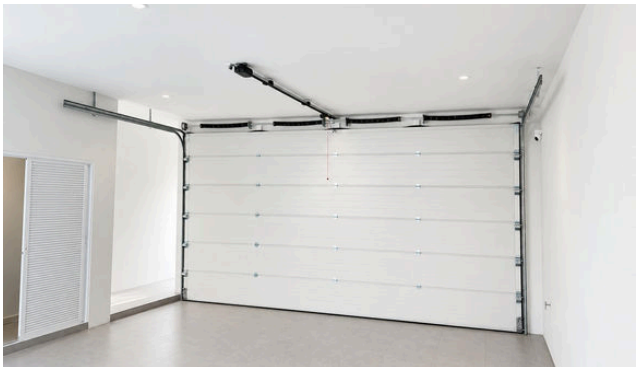

Ideal for Security/Insulation
OZ Garage Doors are manufactured from high-quality materials to deliver exceptional strength, durability, and ease of operation. Designed with excellent thermal insulation properties, they help reduce energy loss while enhancing indoor comfort and providing reliable protection for your property

Ideal for Beautiful appearance
The OZ FV Garage Door features a sleek full-view glass design that allows abundant natural light to enter the building, creating a bright, spacious, and sophisticated atmosphere. Its contemporary appearance makes it the perfect choice for residential homes, showrooms, commercial buildings, and modern architectural projects

GD FINGER PROTECTION PANELS

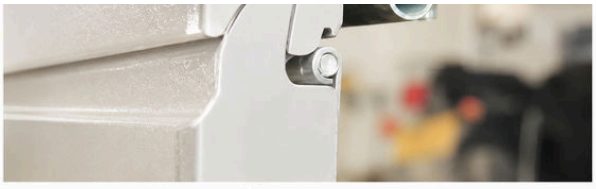

-Galvanized steel two layer filled with PU foam
-Good at Sound proofing and Insulation:
(Thermal ≤ 0.033W/m2 K, Sound 24dB)
-Finger protection design
-Diverse designs and colors

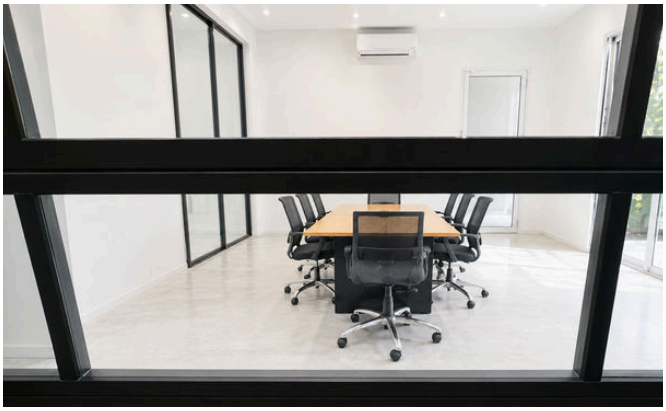

-Aluminum alloy 6063T5 with Painting
-Glass : Polycarbonate 3mm or Tempered glass 3mm(W4000mm<)
-Finger protection design
-Adjustable for each window size and colors

LIFT TYPE & REQUIREMENT

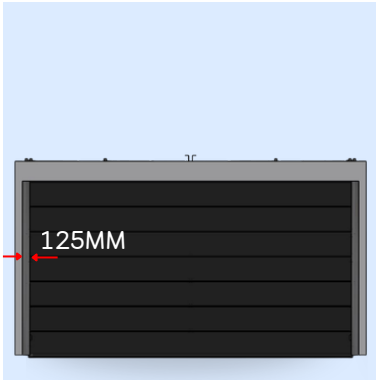

Frame

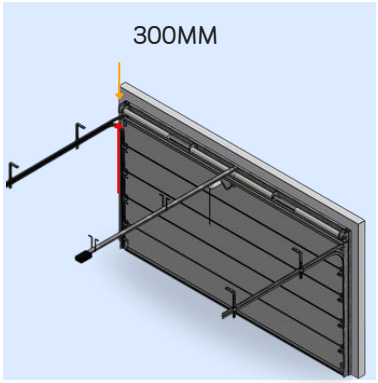

Standard Lift

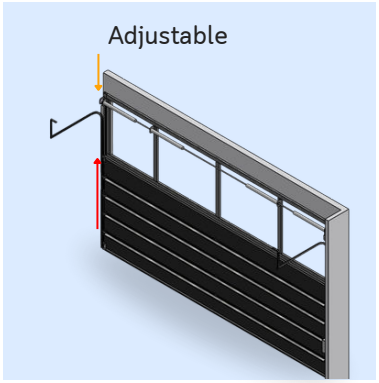

High Lift

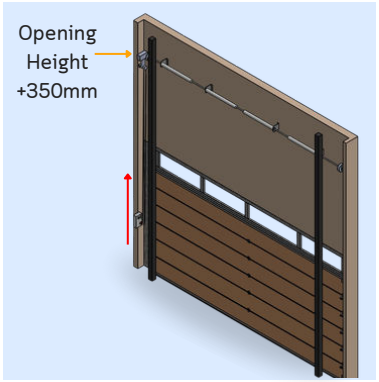

Vertical Lift

Garage door are railed differently to suit the customer's site. OZ door master will directly check the site and provide the right solution

SPECIAL DESIGH

*Designed and manufactured according to customer specifications under company terms and conditions

SPECIAL COLOR

*For special colors, Most colors are possible BUT Please refer to RAL COLOR CHART and contact us
Please note that it take about 45 days for all special designs and colors to be imported after production

PEDESTRIAN DOOR (Optional)

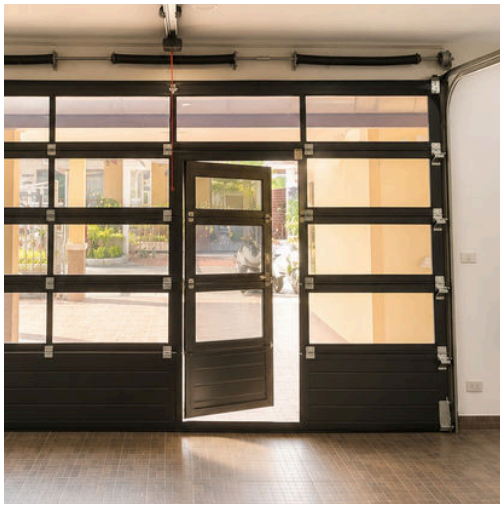

For Standard model, it is only possible if the width is 5000mm or less
For Full-Vision model, it is only possible if the width is 3000mm or less

DATA SHEET

Operator
Opening and closing speed 0.2~0.4m/s
Power Output 1100W
Power Supply 220V±10% / 50hz / 1 phase
Protection Rating (Motor) IP55
Manual Release Handle
Environmental Conditions -35°C ~ 60°C
Limit Switch Absolute Encoder
Self Lock Integrated Mechanical Brake
Noise ≤60db

Hardware
Rail strengthen plate 2.0mm galvanized steel plate
Hinge 2.5mm galvanized steel plate
Spring axis 25.4mm galvanized steel bar
Spring brace 4.0mm galvanized steel plate
Spring chosen according to door size,
weight and lifting pattern with Spring brake device

Panel
Max size W11000mm, H3000mm
Plate Two layer 0.5mm pre coated steel
Filling Environment friendly polyurethane complying with international environment protection treaty 141B
Total thickness 40mm (standard)
Thermal insulation 1.0W/33W/m2·K
Sound insulation 24dB
PU density 48 kg/m3
Fire retardation Class A
Surface printing layer 30um
Wind resistance 30m/s

Warranty
Hardware 2 Years
Panel 2 Years
Spring 2 Years
Operator 2 Year

OPERATOR

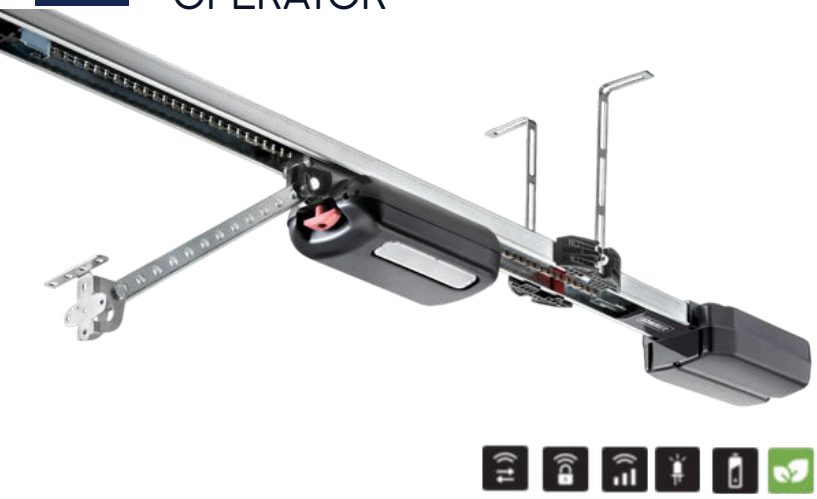

SOMMER SOMloq2

2 years GUARANTEE *

BAS.T CERTIFIED QUALITY

SOMMER
MADE IN GERMANY

Our garage dor operator are tested and certified according to the strictest guidelines Experience over more than 40 years ensures
that ou products are of the highest quality and naturally Made in Germany

Pearl Vibe

-Option of querying door positions/reception status
-Noticeable feedack of radio commands with vibration
-Battery-operated

SOMtouch

-Bidirectional SOMloq2 radio control system
-Feedback of radio commands with LED
-Battery-operated

SAFETY DEVICE

One-way photocell 4-wire

Safetybeam detects objects during closing door stops working immediately **(Standard)**

Signal transmission system DoorScout

Safetyedge contact obstacles during closing door stops working immediately **(Optional)**

Accessories
For all Garage doors

Lumi+
Additional LED lighting for the roof control, It is switched in parallel with the lighting in the carriage and can be easily switched on and off using the light function by eans of a transmitter



Buzzer
Two functions in one product : The alarm buzzer recognises a break-in attempt and outputs a loud signal tone. The warning buzzer, on the other hand, outputs an acoustic signal during the closing process or when the slip door is open

Accu
Supplies energy to the operator for maximum 5 door cycles > in the event of a power failure

Pearl holder&visor clip
For mounting in th car or on the wall

ENTRApin+
ENTRApin+ works with a numeric code of at least 4 and no more than 8 digits.
Bidirectional SOMloq2 radio system
Feedback of radio commands with LED
Battery-operated

App control
allows you to control garage doors via voice control
Check the status of the current door (open, closed)
Manage anywhere in the world over the Internet
Check the open and closed history

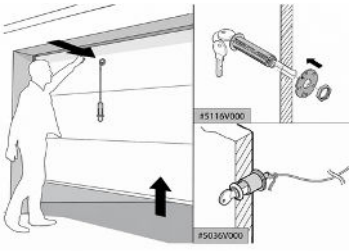

Emergency Release Lock
Manually release your garage door opener with a key in the case of power outage or operator failure.
A must for garages without an access door

ENTRAsys+ finger scanner
Memory locations: 50-80 fingerprints
Administrators: 9 fingerprints
Radio commands: 4
Range: approx. 25 m (depending on the surroundings)
Dimensions: 64.5 × 130 × 37 mm
Battery: 4× Mignon (AA), 1.5 V
Temperature range: –20 °C to +55 °C

*Other accessories

OZ Doors Range

A Wide Range to Satisfy All Needs

OZ door is not just a specialist in industrial and Garage doors. More than 10 years of experience in its sector have led OZ to extend its product range, to fully satisfy all the needs of its customers.
Oz door range of products brings together variety, innovation, functionality, quality, price and service, this is the result of the constant work of its different departments.
Just contact the OZ specialists and they will deal with meeting all of your needs.

2 Year Perfect Warranty

With confidence and technology in our products, we offer a full two-year warranty on all industrial automatic doors.
Unlike other companies that import and install doors, OZ is possible because it directly manufactures and installs/services in Thailand. You can use it after installation without any worries.

High-Speed door

Sectional door

Dock shelter/leveler

Auto doors

Fold-up High-Speed Door

Spiral door

Auto gate

Garage door

Regulative:

All Doors of OZ designed in compliance with norm **UNE-EN 13241**
In addition to the following parameters:
EN 12604:2000 Mechanical aspects of the doors (requirements)
EN 12605:2000 Mechanical aspects of the doors (tests)
EN 12453:2000 Security in the use of motorized doors (requirements)
EN 12445:2000 Security in the use of motorized doors (tests)

https://ozdoor.co.th
Email: Info@ozdoor.co.th
Line: @ozdoor
061 393 1020 (K. Kob)
091 756 3717 (K Por)

- OZ door reserves the right to change the specifactions witout prio notce with a view to improving the product
- The data in this catalogue are informative in nature and in no case may be deemed th represent contractual conditions